

Seventh Semester B.E. Degree Examination, Jan./Feb. 2023

Control Engineering

Time: 3 hrs.

Max. Marks: 100

Note: Answer any FIVE full questions, choosing ONE full question from each module.

Module-1

- 1 a. Define a control system. Explain open and closed loop control systems. (10 Marks)
- b. With a block diagram, explain
 - (i) PD controller
 - (ii) PID controller
 (10 Marks)

OR

- 2 a. Derive the transfer function of an armature controlled d.c. motor. (12 Marks)
- b. Derive the transfer function of simple liquid level system. (08 Marks)

Module-2

- 3 a. Derive an expression for response of 1st order system for unit step input. (10 Marks)
- b. A system has the following transfer function $\frac{C(s)}{R(s)} = \frac{20}{s+10}$. Determine its unit impulse and step response with zero initial condition. Sketch the response. (10 Marks)

OR

- 4 a. Define steady state error and derive an expression for steady state error. (10 Marks)
- b. For a control system shown in Fig. Q4 (b), find the value of K_1 and K_2 so that $M_p = 25\%$ and $T_p = 4$ sec. Assume unit step input. (10 Marks)

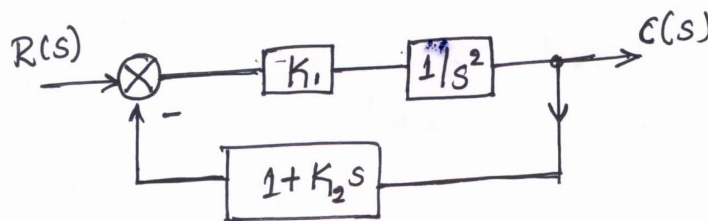


Fig. Q4 (b)

Module-3

- 5 a. Reduce the block diagram and obtain transfer function for the system shown in Fig. Q5 (a) (10 Marks)

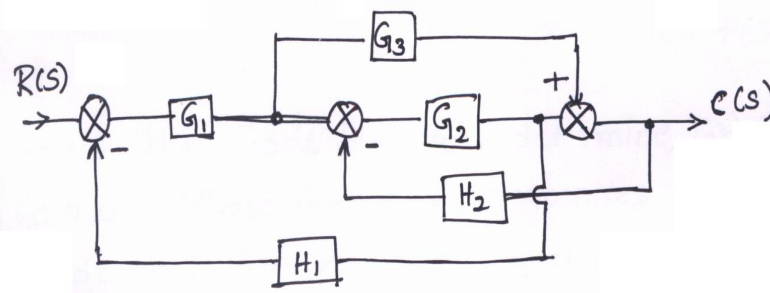


Fig. Q5 (a)

- b. Obtain the Transfer function of the signal flow graph shown in Fig. Q5 (b), using Mason's gain. (10 Marks)

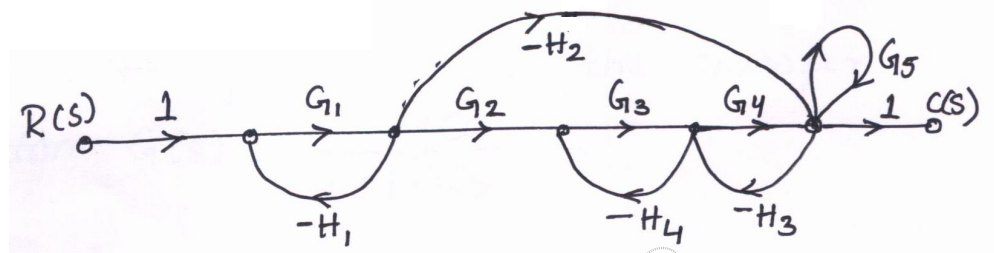


Fig. Q5 (b)

OR

- 6 a. Explain the elements of block diagram with a simple sketch. (08 Marks)
b. Construct the signal flow graph for the following set of system equations:

$$Y_2 = G_1 Y_1 + G_3 Y_3$$

$$Y_3 = G_4 Y_1 + G_2 Y_2 + G_5 Y_3$$

$$Y_4 = G_6 Y_2 + G_7 Y_3$$

where Y_4 is output. Find transfer function $\frac{Y_4}{Y_1}$.

(12 Marks)

Module-4

- 7 a. State and explain the Routh's stability criterion. (08 Marks)
b. For a system with characteristic equation,
 $F(s) = s^6 + 3s^5 + 4s^4 + 6s^3 + 5s^2 + 3s + 2 = 0$
Use Routh's criteria to determine the stability of a system. (12 Marks)

OR

- 8 Sketch the root locus for the OFB system whose open loop TF $G(s)H(s) = \frac{K}{s(s^2 + 6s + 10)}$. (20 Marks)

Module-5

- 9 Draw the Bode plot and determine GM.PM, Gain and Phase crossover frequencies for a unity feedback system having open loop TF. (20 Marks)

$$G(s) = \frac{10}{s(1 + 0.1s)(1 + 0.05s)}$$

OR

- 10 a. Sketch the polar plot for the transfer function : $G(s) = \frac{10}{s(s+1)(s+2)}$. (10 Marks)
b. Determine the stability of the system with $G(s)H(s) = \frac{(s+6)}{(s+2)(s-1)}$ using Nyquist stability criterion. (10 Marks)

* * * * *